


VAR	DATE	ECN	REV	PART NO.	MODEL	CABLE LENGTH
A03	-	-	-	128-6029A03	6029A03	3 FT
A05	-	-	-	128-6029A05	6029A05	5 FT
A10	-	-	-	128-6029A10	6029A10	10 FT
AXX	-	-	-	128-6029AXX	6029AXX	A/R

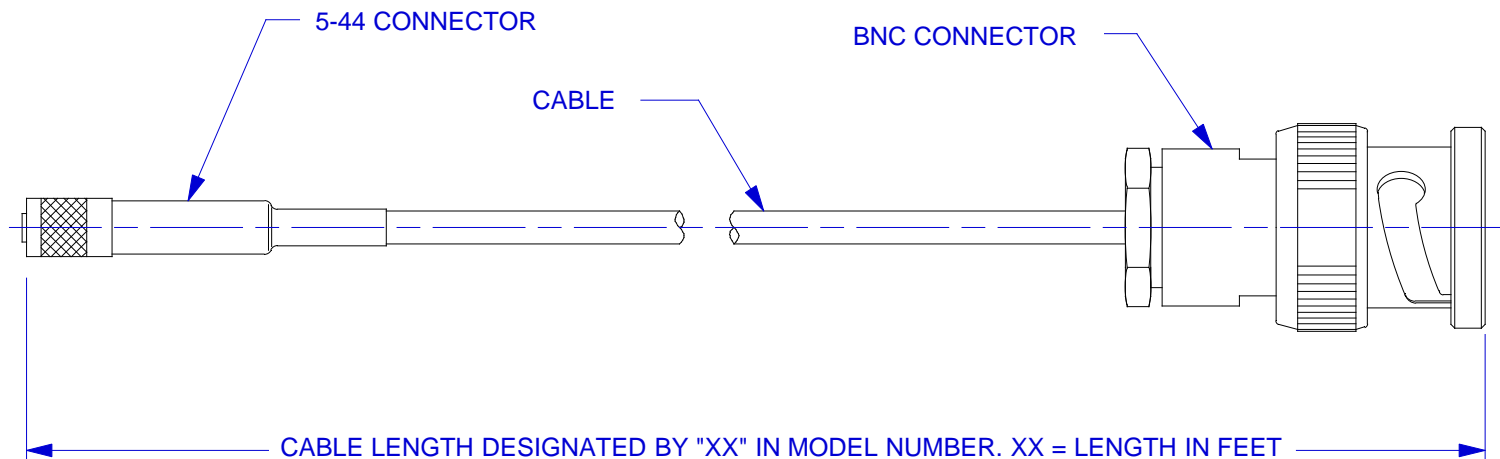

1. SEE CHART FOR CABLE LENGTH.

ALL PART NUMBER LETTERSUFFIXES ARE TO BE INTERPRETED AS FOLLOWS:
 I.E. - 107-0000-01 (X)
M - MACHINED ONLY (UNPLATED) **G** - MATERIAL HAS BEEN GRAINED
P - PLATED/PAINTED **S** - MATERIAL HAS BEEN SAWCUT
H - HEAT TREATED **E** - ENVIRONMENTAL TEST

EXCEPT AS OTHERWISE NOTED
 ALL DIMENSIONS IN INCHES
 TOLERANCE: .XXX = ± .XX = ±
 SURFACE FINISH ✓
 EXCEPT AS NOTED
 BREAK EDGES TO DEBURR MAX
 RADIUS OR CHAMFER
 THESE DIAS ⊙ TO T.I.R.
 FILLETS - MAX RAD.



CHATSWORTH, CA.

SCALE	2X	REV	SEE CHART	DATE	SEE CHART	ECN	SEE CHART
DATE	7/31/02	PART NO.	6029AXX				
DRAWN	N.C.	CHECKED	N.C.		MAT'L		
APPROVED					NEXT ASSEMBLY	USED ON	SEE CHART
TITLE						DWG NO.	
OUTLINE DRAWING, CABLE, 5-44 PLUG TO BNC PLUG, MODEL 6029A						127-6029A	
						SHEET 1 OF 1	