

GRAS 40BF

1/4" Ext. Polarized Free-field
Microphone



Freq range: 4 Hz to 100 kHz
Dyn range: 30 dB(A) to 172 dB
Sensitivity: 4 mV/Pa

The 40BF is an IEC 61094 WS3F 1/4" externally polarized free-field microphone with rear-venting. The prepolarized equivalent is GRAS 40BE.

Introduction

It's a low sensitivity microphone that is ideal for high-level and high-frequency measurements. It can measure high sound pressure levels of up to 166 dB due to its low sensitivity. Its frequency range reaches up to 100 kHz due to its small size.

40BF is individually factory-calibrated and delivered with a calibration chart stating its specific open-circuit sensitivity and pressure frequency response.

Typical applications and use

The 40BF is typically used for high frequency and high-level measurements, and acoustic-transient measurements.

40BF is included in [GRAS 46BF-1 1/4" Free-Field Set](#).

Compatibility

The 40BF requires a standardized 1/2" or 1/4" LEMO preamplifier and an input module that supports this technology with a 7-pin LEMO connector and polarization and supply voltages for microphone and preamplifier.

System verification

For daily verification and check of your measurement setup, we recommend using a calibrator like [GRAS 42AG](#)

For proper sensitivity calibration, we recommend using a pistonphone like [GRAS 42AP](#) Intelligent Pistonphone.

Calibration

When leaving the factory, all GRAS microphones have been calibrated in a controlled laboratory environment using traceable calibration equipment. Depending on the use, measurement environment and internal quality control programs we recommend that the microphone is recalibrated at

least once a year.

We offer two kinds of calibration as an optional after-sales service: GRAS Traceable Calibration and GRAS Accredited Calibration.

GRAS Traceable Calibration is a traceable calibration performed by trained personnel under controlled conditions according to established procedures and standards. This is identical to the rigorous calibration that all GRAS microphones are subjected to as an integral part of our quality assurance.

GRAS Accredited Calibration is performed by the GRAS Accredited Calibration Laboratory that has been accredited in accordance with ISO 17025 by DANAK, the Danish Accreditation Fund.

If you want a new microphone set delivered with an accredited calibration in stead of the default factory calibration, specify this when ordering.

Learn more at [gras/calib](https://www.gras.com/calib).

Quality and warranty

All GRAS microphones are made of high-quality materials that will ensure life-long stability and robustness. The microphones are all assembled in verified clean-room environments by skilled and dedicated operators with many years of expertise in this field.


The microphone diaphragm, body, and improved protection grid are made of high-grade stainless steel, which makes the microphone resistant to physical damage, as well as corrosion caused by aggressive air or gasses.

This, combined with the reinforced gold-plated microphone terminal which guarantees a highly reliable connection, enables GRAS to offer 5 years warranty against defective materials and workmanship.


Service

If you accidentally damage the diaphragm on a GRAS microphone, we can – in most cases – replace it at a very reasonable cost and with a short turn-around time. This not only protects your investment, but also pleases your quality assurance department because you don't have to worry about new serial numbers, etc.

Polarization/Connection		200 V / Traditional
Frequency range (± 1 dB)	Hz	10 to 40 k
Frequency range (± 2 dB)	Hz	4 to 100 k
Dynamic range lower limit (microphone thermal noise)	dB(A)	30
Dynamic range lower limit with GRAS preamplifier	dB(A)	35
Dynamic range upper limit	dB	172
Dynamic range upper limit with GRAS preamplifier @ +28 V / ± 14 V power supply	dB	163
Dynamic range upper limit with GRAS preamplifier @ +120 V / ± 60 V power supply	dB	172
Open-circuit sensitivity @ 250 Hz (± 3 dB)	mV/Pa	4
Open-circuit sensitivity @ 250 Hz (± 3 dB)	dB re 1V/Pa	-48
Resonance frequency	kHz	100
Microphone cartridge capacitance, typ.	pF	7
Microphone venting		Rear
Temperature range, operation	$^{\circ}\text{C}$ / $^{\circ}\text{F}$	-40 to 150 / -40 to 302
IEC 61094-4 Designation		507
Temperature range, storage	$^{\circ}\text{C}$ / $^{\circ}\text{F}$	-40 to 85 / -40 to 185
Temperature coefficient @250 Hz	dB/ $^{\circ}\text{C}$ / dB/ $^{\circ}\text{F}$	-0.01 / -0.006
Static pressure coefficient @250 Hz	dB/kPa	-0.02
Humidity range non condensing	% RH	0 to 90
Humidity coefficient @250 Hz	dB/% RH	-0.0013
Influence of axial vibration @1 m/s ²	dB re 20 μPa	60
CE/RoHS compliant/WEEE registered		Yes / Yes, Yes
Weight	g / oz	1.75 / 0.062

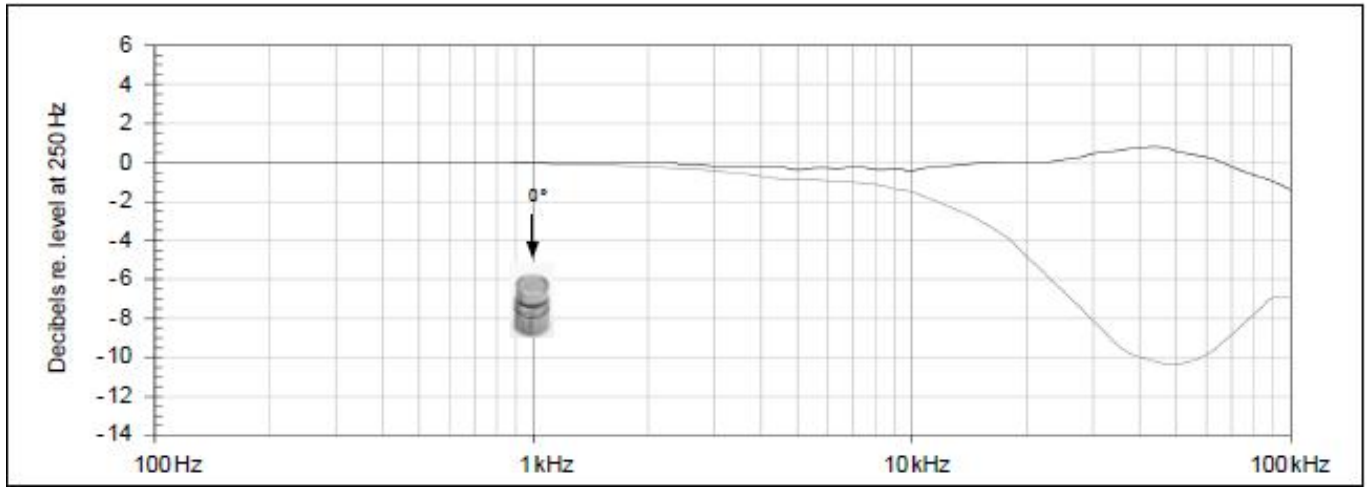



Typical frequency response (without protection grid). Upper curve shows free-field response for 0°, lower curve shows pressure response.

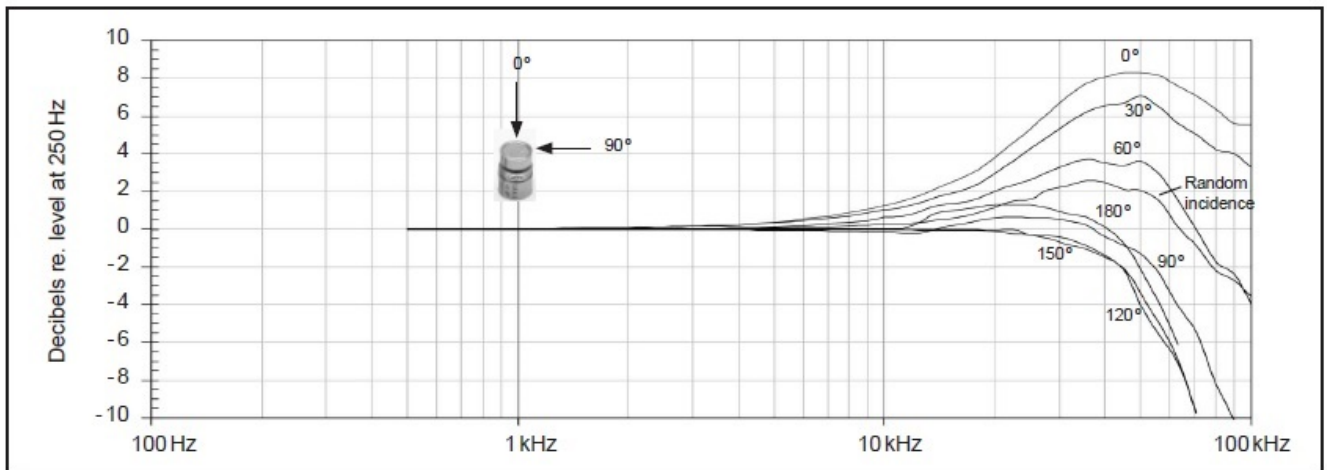

Free-field corrections for different angles of incidence

GRAS Sound & Vibration reserves the right to change specifications without notice.

Dimensions in mm

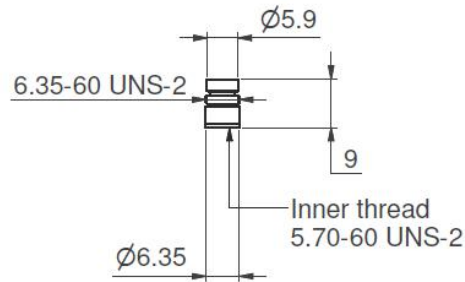

Optional items

GRAS RA0086	Transmitter adapter for 1/4" microphones
GRAS CA0001	Traceable Calibration of Microphone
GRAS CA2001	Accredited Calibration of Microphone

GRAS Sound & Vibration reserves the right to change accessories without notice.

GRAS Worldwide

Subsidiaries and distributors in more
than 40 countries

GRAS SOUND & VIBRATION

Skovlytoften 33
2840 Holte
Denmark
Tel: +45 4566 4046
gras@gras.dk

GRAS SOUND & VIBRATION USA

2234 East Enterprise Parkway
Twinsburg, OH 44087
United States
Tel: +1 330 425 1201
sales@gras.us

GRAS SOUND & VIBRATION UK

Building 115
Bedford Technology Park Thurleigh,
MK44 2YA Bedford
United Kingdom
Tel: +44 1234 639552
sales@gras.co.uk

GRAS SOUND & VIBRATION CHINA LTD.

Rm 1606, Kodak House II
No. 39 Healthy Street East North Point
Hong Kong
China
Tel: +852 2833 9987
sales@gras.com.cn



About GRAS Sound & Vibration

GRAS is a worldwide leader in the sound and vibration industry. We develop and manufacture state-of-the-art measurement microphones to industries where acoustic measuring accuracy and repeatability is of utmost importance in R&D, QA and production. This includes applications and solutions for customers within the fields of aerospace, automotive, audiology, and consumer electronics. GRAS microphones are designed to live up to the high quality, durability and accuracy that our customers have come to expect and trust.

GRAS Sound
& Vibration